Bench Top Extraction arm FX32 ESD

Flexible bench top extraction arm

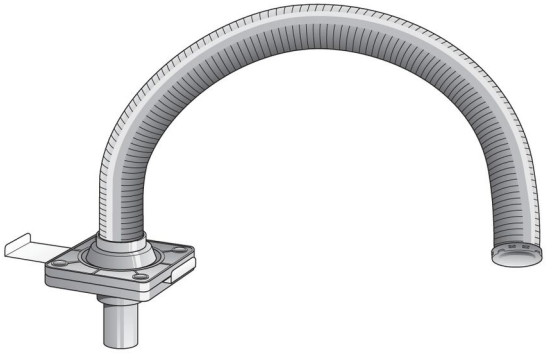

Extractor arms for use in electonic industries, laboratories, schools etc. Flexible plastic hose with a very good resistancy against solvents etc. Stays in new position when adjusted. ESD safe. Swivel with 360 degree rotation. This means that the connected ductwork remains firm and does not rotate with the arm. Mounting directly in bench surface or with accessory brackets. Can be mounted both standing and hanging.

Product name	Bench Top Extraction arm FX32 ESD
Noise level (dB(A))	48
Installation	[Indoor]
Extraction arm diameter (in)	1 1/4
Airflow (CFM)	35
Arm length (ft)	2ft 9in

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Bench Top Extraction arm FX32 ESD

Description	[model]
FX 32 ESD	70502934

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Bench Top Extraction arm FX32 ESD

[accessory]		[partno]
	Dome hood 1/2 for FX 32 ESD	70371807
	Dome hood 1/1 for FX 32 ESD	70371808
	Table bracket, 75/50/32 Std/ESD/PP	70371761
	Wall bracket FX 32 Std/ESD/PP	70371760

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Bench Top Extraction arm FX32 ESD

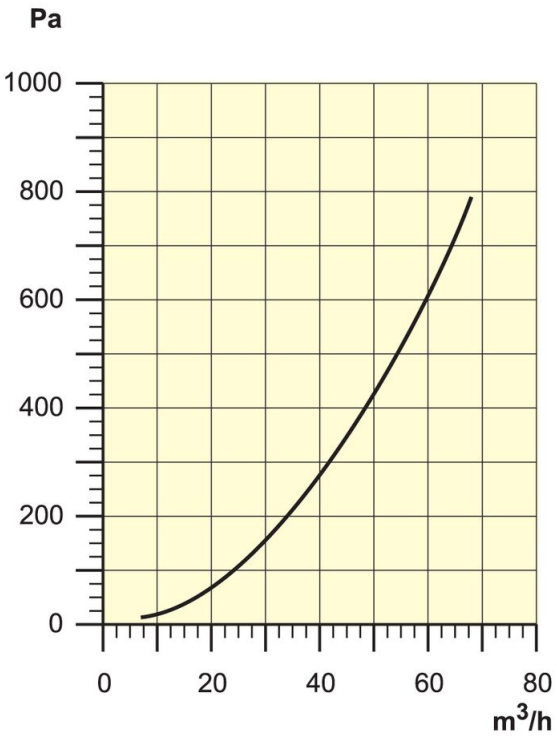

Pressure Drop

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Bench Top Extraction arm FX32 ESD

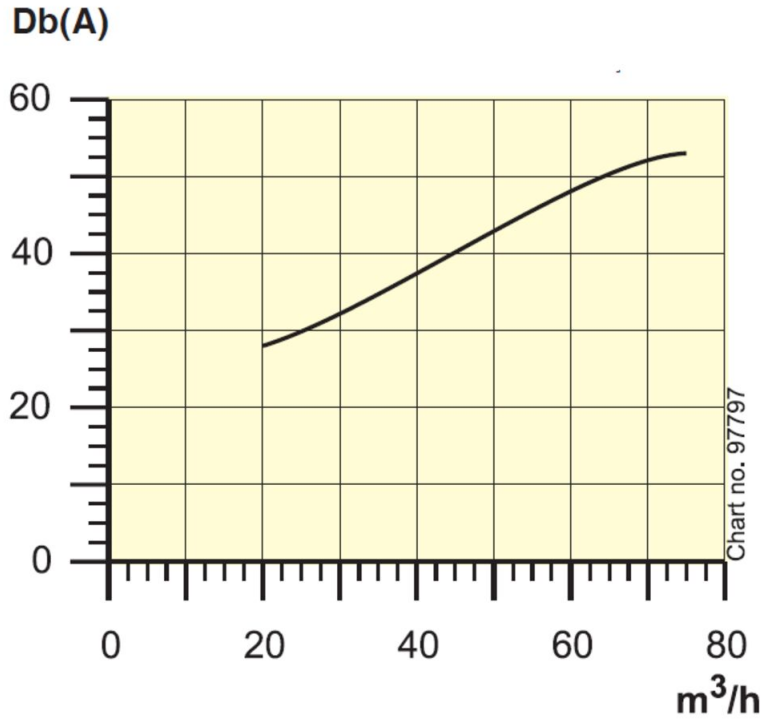

Sound Level
Distance to measuring point = 1m

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Bench Top Extraction arm FX32 ESD

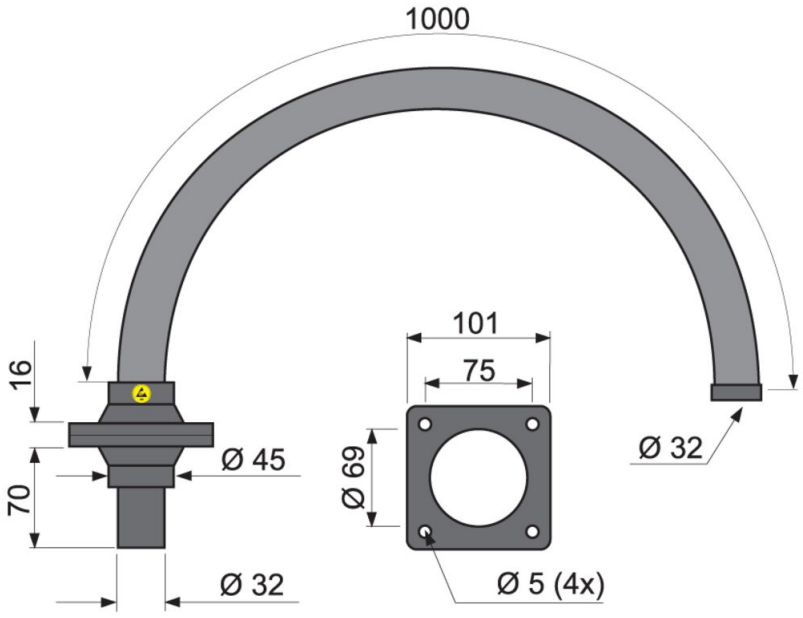

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB